


ADHESIVE MORTAR

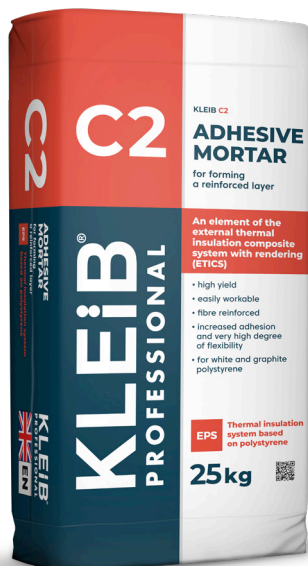

- high yield
- easily workable
- fibre reinforced
- increased adhesion and very high degree of flexibility
- for white and graphite polystyrene

KLEiB C2 is an element of the external thermal insulation composite system with rendering (ETICS) marketed under the trade name KLEiB.

EPS Thermal insulation system based on polystyrene

USE

KLEiB C2 is a cement adhesive mortar for forming a reinforced layer in the KLEiB system. It is also suitable for fixing polystyrene sheets on all typical, structurally sound and even mineral substrates (concretes, renders, brickwork, hollow blockwork, stone elements, cement boards) and insulated concrete formwork.

WORKING SURFACE PREPARATION

Before the formation of a reinforced layer, the surface of the polystyrene sheets should be even, clean, stable and, where sheets were grinded after adhesion, free of dust. In case of using mortar to attach polystyrene sheets, the working surface should be stable, even and structurally sound i.e. strong enough, free from layers that may weaken mortar adhesion, in particular dust, dirt, lime, oil, grease, wax, or residues of oil and emulsion paints. If the surface is too absorbent, it should be cleaned and primed. For this works it is best to apply KLEiB G1 primer.

MIXING THE MORTAR

The mortar is prepared by pouring the entire contents of the bag into a container with a measured amount of water and mixing until a smooth, lump-free uniform consistency is obtained. The mortar is ready to use after 5 minutes and after remixing. Prepare portions that are to be used within approx. 2 hours.

INSTRUCTIONS FOR USE

For bonding polystyrene sheets on even surface, it is advisable to apply the mortar on the entire surface of the insulation sheets and spread it with a notched plasterer's float. Before bonding graphite polystyrene, it should be sanded to enhance the grip of the adhesive mortar. In case of an uneven working surface, the mortar should be applied to the sheet in the form of thick layers along its edges, at the distance of approx. 5 cm from the edge, along with 3 to 6 patches of mortar uniformly distributed on the rest of the sheet's surface. As a result a min. 60% of the surface must be sufficiently adhered to the working surface. Vertical connection of the sheets should be maintained in a staggered arrangement. Further work, i.e. any use of suitable fasteners, grinding of uneven surfaces of sheets, or the application of a reinforced layer can be performed no earlier than after 72 hours. In order to add a reinforced layer on the surface of adhered polystyrene sheets one should apply mortar with the minimum thickness of 3 mm, spread it with a notched plasterer's float and embed in this a reinforcing mesh of fibreglass. The mesh is best embedded in an arrangement of vertical strips and these to be smoothed so that it is completely invisible and at the same time is not in direct contact with polystyrene sheets. The mesh should be firmly stretched out and completely covered with a layer of mortar with a minimum thickness of 1 mm. Mesh strips should be connected to each other by a min. 10 cm wide overlap. The use of protective nets on scaffolding is recommended. Priming with a suitable primer can begin no earlier than after 72 hours. Tools should be washed with water immediately after use.

USAGE

Approx. 3.0-4.0 kg/m² for forming a reinforced layer. Approx. 4.0-5.0 kg/m² for attaching sheets.

STORAGE AND TRANSPORT

The mortar must be transported and stored in tightly sealed bags, in dry conditions. Protect from dampness. Shelf life in conditions that comply with the specified requirements is 12 months from the production date on the packaging.

TECHNICAL SPECIFICATIONS

Mixing ratio	0.18-0.20 litres of water per 1 kg of mortar
	4.50-5.00 litres of water per 25 kg of mortar
Working surface temperature and ambient temperature during work	between +5°C and +25°C

C2	net weight	pieces per pallet	consumption
		25 kg	54

	EAD 040083-00-404 ETA 16/0978	KLEIB sp. z o.o. Pikutkowo 43, 87-880 Brześć Kujawski tel.: +48 54 233 82 83 www.kleib.pl
Unique identification code of the product type: KLEIB ETICS		
Reference number of the declaration of performance: 1 KLEIB/2017		
The ETICS system is designed to be used as an external thermal insulation of walls of new buildings, and for renovation of the existing ones.		
<p style="text-align: center;">UFI: K110-1068-7002-STQR</p>		

DANGER

Contains Portland cement, Portland cement dust.

- H315** Causes skin irritation.
- H317** May cause an allergic skin reaction.
- H318** Causes serious eye damage.
- H335** May cause respiratory irritation.
- P261** Avoid breathing dust.
- P280** Wear protective gloves/protective clothing/eye protection/face protection.
- P305** IF IN EYES: Rinse cautiously with water for several minutes.
- + **P351** Remove contact lenses, if present and easy to do. Continue rinsing.
- + **P338**
- P302** IF ON SKIN: Wash with plenty of soap and water.
- + **P352**
- P310** Immediately call a POISON CENTER or a doctor/physician.
- P501** Dispose of contents/container to properly labelled waste containers in accordance with national regulations.



The content of soluble chromium (VI) in the product is below 2 ppm throughout the shelf life provided on the packaging. After that time, the risk of a chromium allergy increases.